

### SPECIFICATIONS

| EC Power Box<br>Max. m <sup>3</sup> /h   | 280m <sup>3</sup> /h            | 500m <sup>3</sup> /h            | 750m <sup>3</sup> /h            | 1000m <sup>3</sup> /h           | 1500m <sup>3</sup> /h           | 3500m <sup>3</sup> /h           | 5000m <sup>3</sup> /h<br>VAC 3-380-480 | 7000m <sup>3</sup> /h           | 11000m <sup>3</sup> /h          | 18000m <sup>3</sup> /h          |
|--|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|--|---------------------------------|---------------------------------|---------------------------------|
| <b>Product code</b>                      | ART-PB01                        | ART-PB13                        | ART-PB02                        | ART-PB03                        | ART-PB05                        | ART-PB07                        | ART-PB09                               | ART-PB10                        | ART-PB11                        | ART-PB12                        |
| <b>Fan manufacturer</b>                  | ebm-papst<br>K3G133-<br>RA01-03 | ebm-papst<br>K3G160-<br>RB31-03 | ebm-papst<br>K3G190-<br>RC05-03 | ebm-papst<br>K3G190-<br>RD45-03 | ebm-papst<br>K3G250-<br>RE07-07 | ebm-papst<br>K3G280-<br>RR03-H2 | ebm-papst<br>K3G310-<br>PT08-J2        | ebm-papst<br>K3G310-<br>PH58-02 | ebm-papst<br>K3G400-<br>PA27-71 | ebm-papst<br>K3G500-<br>PB33-01 |
| <b>W / A / VAC</b>                       | 27/0.27/<br>200-240             | 85/0.75/<br>200-240             | 83/0.75/<br>200-240             | 169/1.35/<br>200-240            | 170/1.4/<br>200-240             | 500/2.2/<br>200-277             | 1230/1.9/<br>380-480                   | 2950/4.6/<br>380-480            | 3350/5.2/<br>380-480            | 5700/9.0/<br>380-480            |
| <b>Max. Pa</b>                           | 450                             | 820                             | 700                             | 1200                            | 625                             | 950                             | 1200                                   | 2125                            | 1600                            | 1790                            |
| <b>Connection in mm D</b>                | Ø 125                           | Ø 160                           | Ø 200                           | Ø 200                           | Ø 250                           | Ø 315                           | Ø 400                                  | Ø 400                           | Ø 500                           | Nach Wunsch                     |
| <b>Weight in kg</b>                      | 4.0                             | 5.5                             | 7.2                             | 7.6                             | 12.4                            | 25.7                            | 50.5                                   | 50                              | 67                              | 123                             |
| <b>Dimensions in mm</b>                  |                                 |                                 |                                 |                                 |                                 |                                 |  |                                 |                                 |                                 |
| <b>L1</b>                                | 200                             | 230                             | 270                             | 270                             | 350                             | 380                             | 600                                    | 600                             | 650                             | 1000                            |
| <b>L2</b>                                | 298                             | 308                             | 368                             | 368                             | 448                             | 478                             | 698                                    | 698                             | 748                             | 1098                            |
| <b>W1</b>                                | 273                             | 323                             | 383                             | 383                             | 505                             | 565                             | 603                                    | 603                             | 805                             | 880                             |
| <b>H</b>                                 | 273                             | 323                             | 383                             | 383                             | 505                             | 565                             | 603                                    | 603                             | 803                             | 880                             |
| <b>Hanging points M6, in mm</b>          |                                 |                                 |                                 |                                 |                                 |                                 |  |                                 |                                 |                                 |
| <b>L3</b>                                | 100                             | 135                             | 170                             | 170                             | 270                             | 280                             | 450                                    | 450                             | /                               | /                               |
| <b>W2</b>                                | 170                             | 235                             | 280                             | 280                             | 380                             | 460                             | 450                                    | 450                             | /                               | /                               |
| <b>Impeller material</b>                 | PA plastic                      | PA plastic                      | PA plastic                      | PA plastic                      | PA plastic                      | PA plastic                      | Aluminium                              | Aluminium                       | Aluminium                       | Aluminium                       |
| <b>Housing material</b>                  | Steel                           | Steel                           | Steel                           | Steel                           | Steel                           | Steel                           | Steel                                  | Steel                           | Steel                           | Steel                           |
| <b>ErP directive overall efficiency:</b> |                                 |                                 |                                 |                                 |                                 |                                 |  |                                 |                                 |                                 |
| <b>Actual</b>                            | ERP-Ready                       | ERP-Ready                       | ERP-Ready                       | 56%                             | 57.8%                           | 67.3%                           | 56.8%                                  | 66.1%                           | 69.4%                           | 69.2%                           |
| <b>Request 2015</b>                      |                                 |                                 |                                 | 43.1%                           | 43.1%                           | 48.4%                           | 56.8%                                  | 56.4%                           | 57%                             | 59.5%                           |

### ENERGY EFFICIENCY

Our motors with modern EC-technology reach excellent efficiencies and save up to 50% energy compared to conventional motor technology.

The slightly higher investment costs compared to conventional motors usually pay for themselves within a very short operating time thanks to lower energy consumption and lower installation costs.

# EC centrifugal module - RadiCal

sickle-shaped blades (S series), single-intake  
with housing

## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | K3G160-RB31-03    |            |
| Motor                    | M3G055-BD         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 4300       |
| Power consumption        | W                 | 85         |
| Current draw             | A                 | 0.75       |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change




## Technical description

|  |   |
|--|---|
| Weight   | 1.2 kg  |
| Size   | 160 mm  |
| Motor size   | 55  |
| Rotor surface  | Thick-film passivated   |
| Electronics housing material   | Die-cast aluminum   |
| Impeller material  | PP plastic  |
| Housing material   | PP plastic  |
| Number of blades   | 7   |
| Direction of rotation  | Clockwise, viewed toward rotor  |
| Degree of protection   | IP54  |
| Insulation class   | "B"   |
| Moisture (F) / Environmental (H) protection class                          | H1  |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C   |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C   |
| Installation position  | Any   |
| Condensation drainage holes  | None, open rotor  |
| Mode   | S1  |
| Motor bearing  | Ball bearing  |
| Technical features   | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 1.1 mA</li> <li>- Tach output</li> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage detection</li> </ul> |
| EMC immunity to interference   | According to EN 61000-6-2 (industrial environment)  |
| EMC circuit feedback   | According to EN 61000-3-2/3   |
| EMC interference emission  | According to EN 61000-6-3 (household environment)   |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA   |
| Motor protection   | Electronic motor protection   |
| With cable   | Lateral   |
| Protection class   | I (with customer connection of protective earth)  |
| Conformity with standards  | EN 60335-1; CE  |

# EC centrifugal module - RadiCal

sickle-shaped blades (S series), single-intake  
with housing


## Product drawing

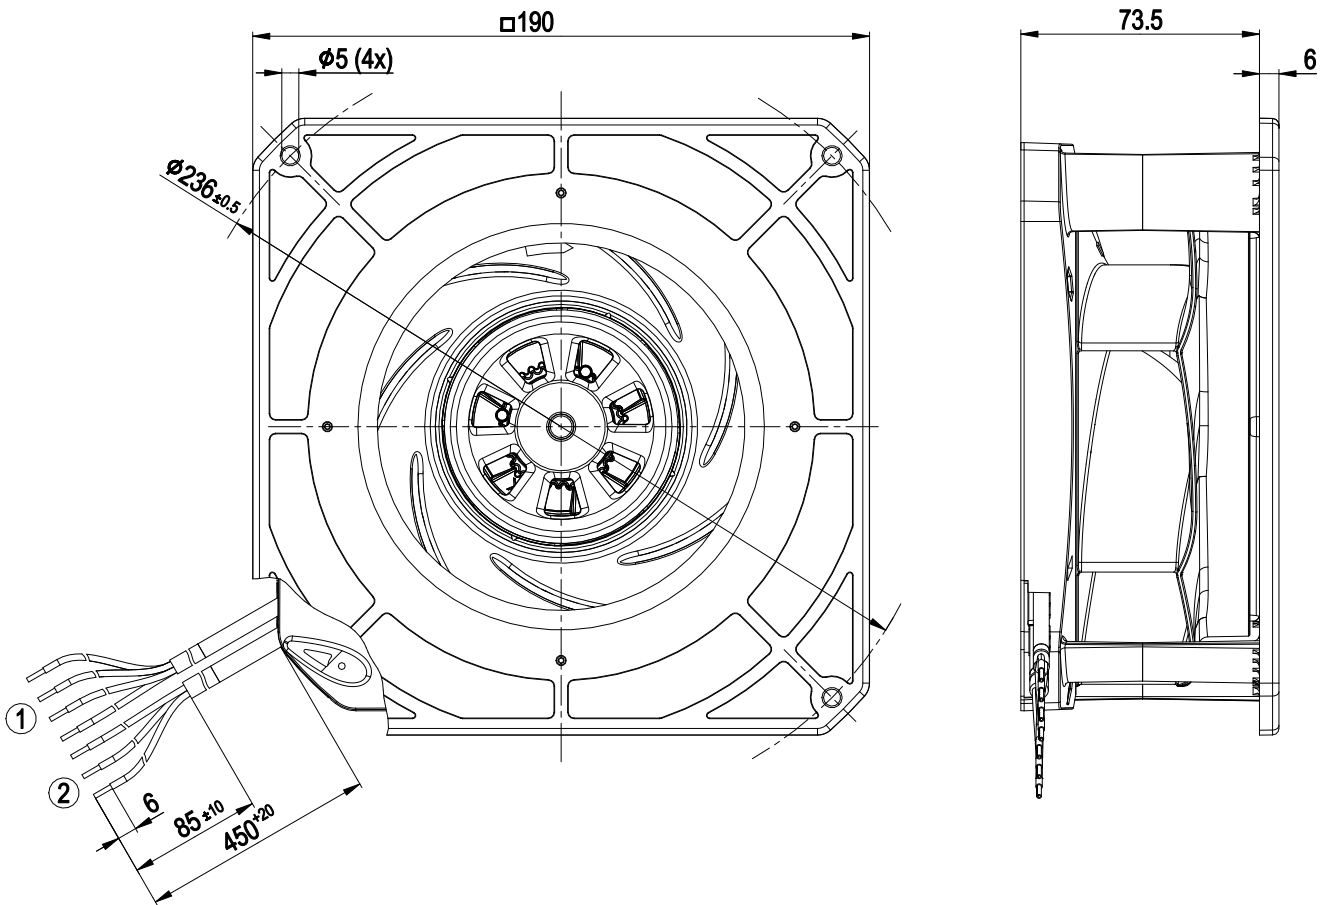

|   |                 |           |   |                 |
|---|-----------------|-----------|---|-----------------|
| 1 | Cable PVC AWG22 | 4x splice | 2 | Cable PVC AWG20 |
|   | 3x splice       |           |   |                 |




## Mounting dimensions

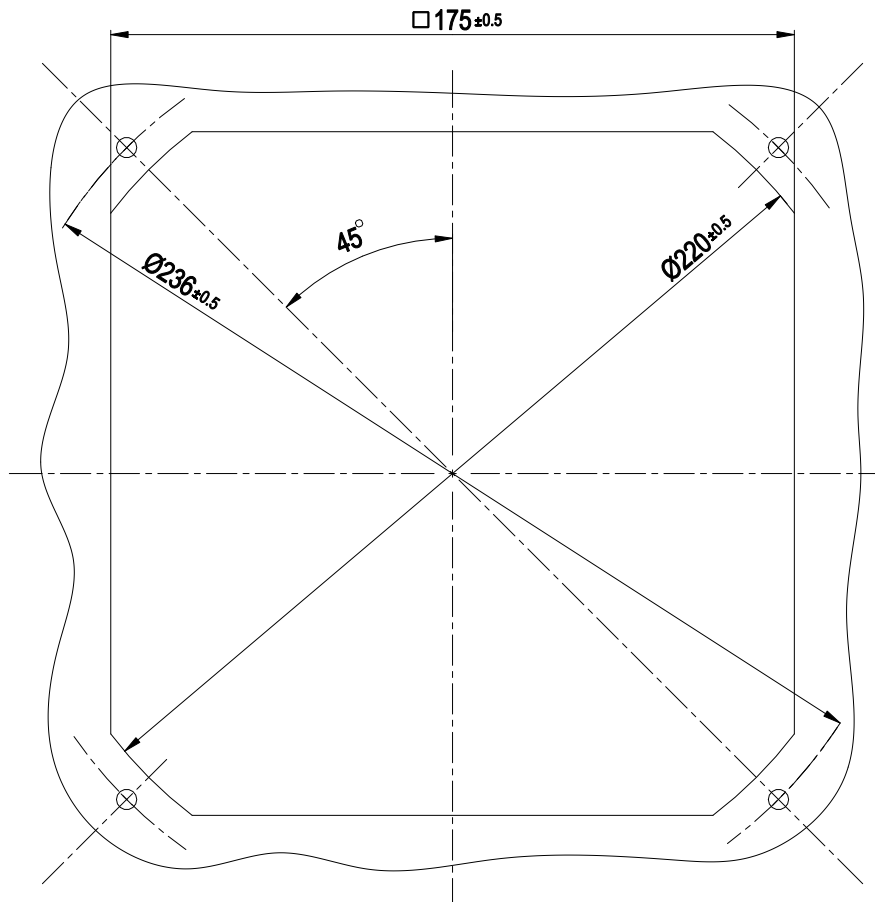

# EC centrifugal module - RadiCal

sickle-shaped blades (S series), single-intake  
with housing

## Connection diagram

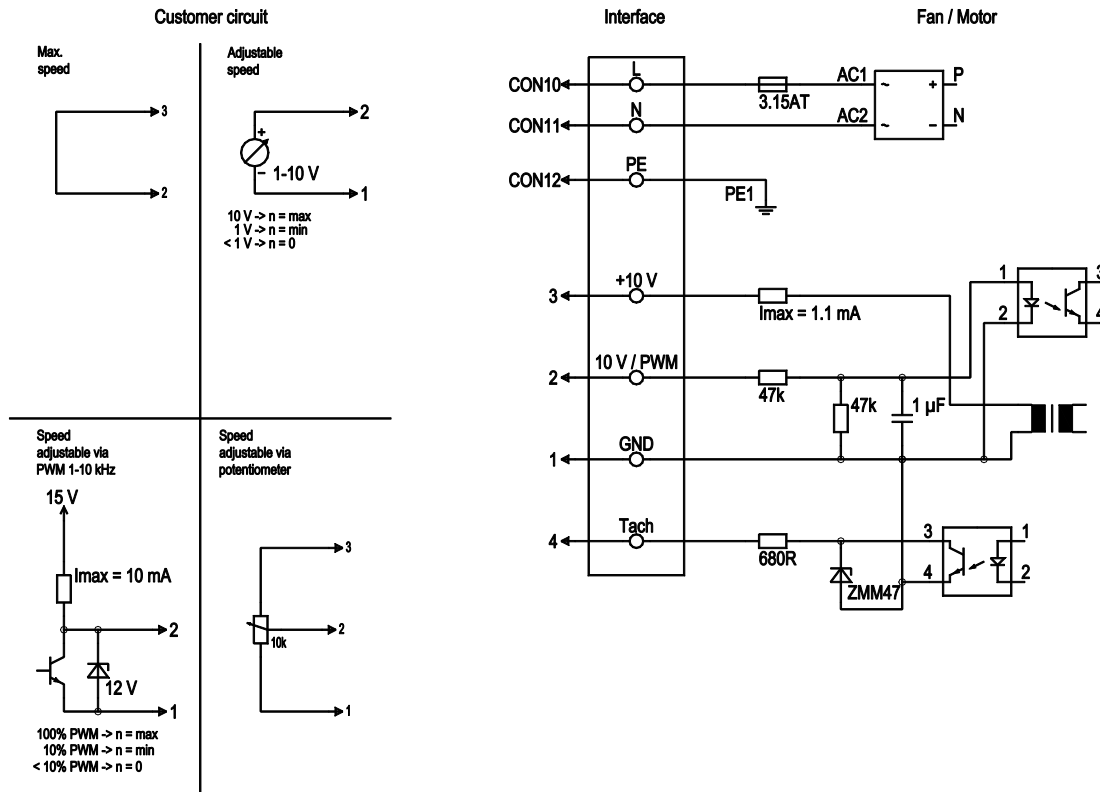


| No. | Conn. | Designation        | Color        | Function/assignment  |
|-----|-------|--------------------|--------------|--|
|     | CON10 | L                  | black        | Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range            |
|     | CON11 | N                  | blue         | Neutral conductor  |
|     | CON12 | PE                 | green/yellow | Protective earth   |
|     | 1     | GND                | blue         | GND connection for control interface                                       |
|     | 2     | 0-10V PWM          | yellow       | Control input 0-10 V or PWM, electrically isolated                         |
|     | 3     | 10 V / max. 1,1 mA | red          | Voltage output 10 VDC 1.1 mA, electrically isolated, short-circuit-proof   |
|     | 4     | Tacho              | white        | Tach output: open collector, 1 pulse per revolution, electrically isolated |



# EC centrifugal module - RadiCal

sickle-shaped blades (S series), single-intake  
with housing

## Curves: Air performance 50 Hz

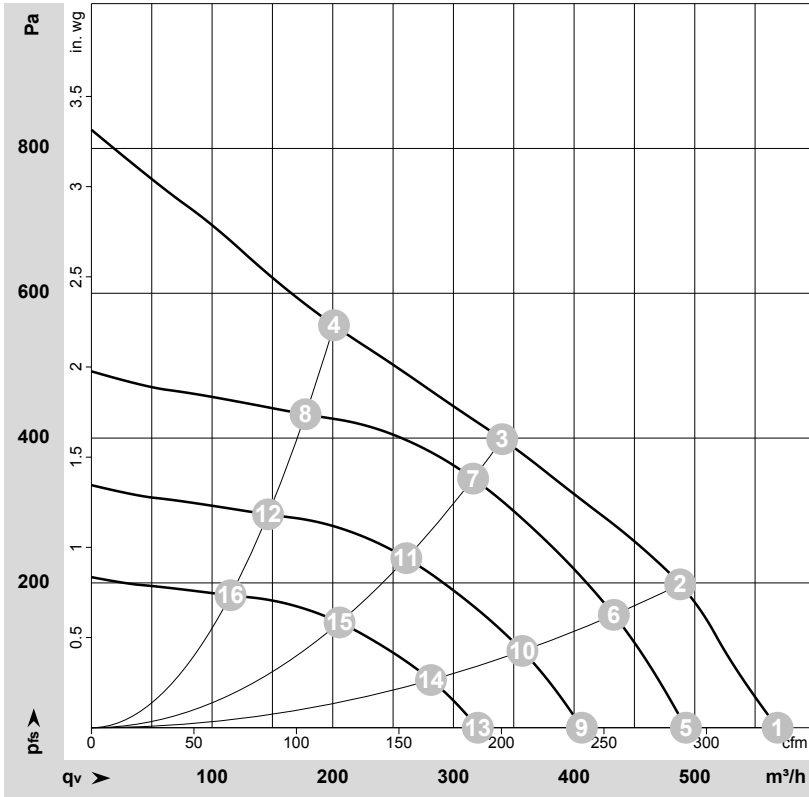

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-193699-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | Wired | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|----|-------|-----|----|-------------------|-----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
|    |       | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1  | 1~    | 230 | 50 | 4615              | 85              | 0.75 | 68                | 76                | 570               | 0               | 335            | 0.00            |
| 2  | 1~    | 230 | 50 | 4510              | 85              | 0.75 | 65                | 74                | 490               | 200             | 285            | 0.80            |
| 3  | 1~    | 230 | 50 | 4300              | 85              | 0.75 | 60                | 68                | 340               | 400             | 200            | 1.61            |
| 4  | 1~    | 230 | 50 | 4530              | 85              | 0.75 | 65                | 74                | 200               | 550             | 120            | 2.21            |
| 5  | 1~    | 230 | 50 | 4000              | 55              | 0.48 | 65                | 73                | 495               | 0               | 290            | 0.00            |
| 6  | 1~    | 230 | 50 | 4000              | 59              | 0.51 | 63                | 71                | 435               | 157             | 255            | 0.63            |
| 7  | 1~    | 230 | 50 | 4000              | 67              | 0.59 | 58                | 66                | 315               | 345             | 185            | 1.39            |
| 8  | 1~    | 230 | 50 | 4000              | 59              | 0.51 | 62                | 71                | 175               | 433             | 105            | 1.74            |
| 9  | 1~    | 230 | 50 | 3300              | 31              | 0.27 | 60                | 68                | 405               | 0               | 240            | 0.00            |
| 10 | 1~    | 230 | 50 | 3300              | 33              | 0.29 | 58                | 66                | 355               | 107             | 210            | 0.43            |
| 11 | 1~    | 230 | 50 | 3300              | 38              | 0.33 | 53                | 61                | 260               | 235             | 155            | 0.94            |
| 12 | 1~    | 230 | 50 | 3300              | 33              | 0.29 | 57                | 66                | 145               | 294             | 85             | 1.18            |
| 13 | 1~    | 230 | 50 | 2600              | 15              | 0.13 | 54                | 62                | 320               | 0               | 190            | 0.00            |
| 14 | 1~    | 230 | 50 | 2600              | 16              | 0.14 | 52                | 60                | 280               | 66              | 165            | 0.26            |
| 15 | 1~    | 230 | 50 | 2600              | 18              | 0.16 | 47                | 55                | 205               | 146             | 120            | 0.59            |
| 16 | 1~    | 230 | 50 | 2600              | 16              | 0.14 | 51                | 60                | 115               | 183             | 70             | 0.73            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

